

AC3 HD-SDI PTZ Camera



Features


- Aluminum housing;
- IP66 weatherproof;
- HD-SDI video output;
- Efficient 60M IR distance;
- Digital image stabilization;
- Wide range of voltage input;
- Self-adaption of protocol & baud rate;
- 1/2.8" CMOS, 20x optical zoom, D/N, WDR;
- Image flip for stand / suspended installation;
- Simultaneously output of both HD & SD videos;
- Special design of drive system, PTZ positioning precision up to +/-0.05 degree.



IP66



Image Flip

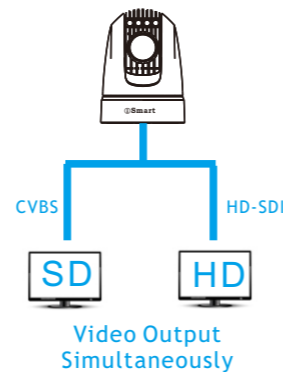

AC3 HD-SDI PTZ Camera

Model	AC3-S2007H-IR
Camera	
Image Sensor	1/2.8" type solid state Progressive Scan CMOS
Effective Pixel	2.14 megapixel
Video Format	HD:1080p/30,1080p/25,1080i/60, 1080i/50, 720p/60, 720p/50, 720p/30,720p/25; SD:PAL/NTSC
Min Illumination	0.5 Lux (Lights Off); 0.1Lux (Lights On)
White Balance	Auto
Focus	Auto/Manual
Exposure	Auto/Manual
S/N Ratio	Not less than 50DB
BLC	On/Off
WDR	On/Off
Digital Noise Reduction	1~5 Steps/OFF
Day/Night	Auto/Manual
Lens	f=4.7mm~94mm, F1.6 to F3.5
View Angle	59.5° (wide) to 3.3° (tele)
Zoom	Optical: 20X; Digital: 12X
PTZ	
Pan Range	360° continuous
Pan Speed	0.1° ~ 60°/s, adjustable
Tilt Range	-15° ~ 90° with auto flip
Tilt Speed	0.2° ~ 60°/s, adjustable
Preset Speed	Pan: 50°/s; Tilt: 50°/s
Preset	256
Preset Precision	±0.05°
IR Light	
Wave Length	850nm
Range	60m
Switch	Auto/Manual
General	
OSD	English
Comm. Port	RS485
Comm. Protocol	PELCO-P / PELCO-D(self-adaptive)
Address	0 ~ 255
Video Output	HD: SDI; SD: CVBS
Baud Rate	2400bps, 4800bps, 9600bps, 19200bps (self-adaptive)
Voltage	DC 9 ~ 36V
Power	<0.5W (Standby); 20W (Max)
Working Temperature	-35°C ~ +65°C
IP Index	IP66
Dimensions	Standard (Without Damper): Φ136(mm)×185(mm)
Weight	Standard (Without Damper): 2.1(±0.2)kg;

