

FLIR

H SERIES

TACTICAL THERMAL NIGHT VISION

SEE AT NIGHT, STAY SAFE

FLIR H-Series set the industry standard for law enforcement thermal imaging cameras and continues to deliver images and video that identifies suspects and keeps officers safe. Being able to see clearly in total darkness enhances mission effectiveness, maximizes operational capabilities, and improves officer safety.

With a variety of lens options and onboard image storage and video capture capabilities, H-Series is a potent thermal imaging package for:

- K-9 operations
- Limited response calls
- Daily patrol
- Reconnaissance & surveillance ops

Visit www.FLIR.com/H-Series for more information, including a product selector guide, interactive simulator, case studies, videos and more.

Now With Interchangeable Lenses



The World's **Sixth Sense**®

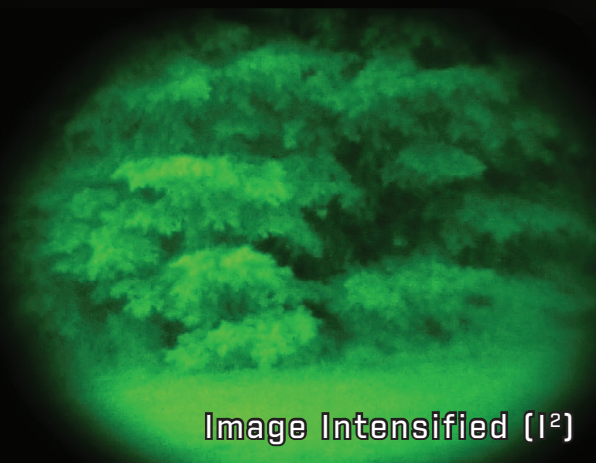


Image Intensified [1²]



Infrared Imaging

SYSTEM	HS-X 320	HS-XR 640
Model	Command	
Detector Resolution	320 x 240	640 x 480
Field of View	24° x 18°	7° x 5°
E-Zoom	2X	
Start-up from Standby	<2 seconds	
IMAGE PRESENTATION		
Image Optimization	FLIR proprietary digital detail enhancement	
Refresh Rate	30Hz – 8Hz exportable	
External Video (via RCA jack)	NTSC or PAL composite video	
Polarity	White Hot, Black Hot	
Video/Still Image Storage, SD/SDHC Card-enabled (up to 16Gb)	Yes	
PHYSICAL		
Weight (w/ battery)	1.45 lb	1.55 lb
Size (LxWxH)	9.36"x3.33"x2.62"	10.96"x3.33"x2.69"
Warranty	1-year Standard; 3/10-year with Registration†	
Country of Origin	USA	
POWER		
Battery Type	4 Rechargeable AA NIMH batteries (included)	
Battery Life Operating	4-5 Hours Typical (100+ Hours)	
ENVIRONMENTAL		
Ratings	IP-67	
Operational Temp	-4° - 140° (-20°-60°)	

LENSES (Purchased Separately)	QD35	QD65	QD100	QD35	QD65	QD100
Size	Ht. - 2.2" Dia - 3.1" Ø	Ht. - 3.3" Dia - 3.1" Ø	Ht. - 4.6" Dia - 3.1" Ø	Ht. - 2.2" Dia - 3.1" Ø	Ht. - 2.2" Dia - 3.1" Ø	Ht. - 2.2" Dia - 3.1" Ø
FOV (320 x 240)	13° x 10°	7° x 5°	5° x 3°	18° x 13°	10° x 8°	6° x 4°
E-Zoom FOV (Resolution):						
2x	6.5° x 5° (160 x 120)	3.5° x 2.5° (160 x 120)	2.5° x 1.5° (160 x 120)	9° x 6.5° (320 x 240)	5° x 4° (320 x 240)	3° x 2° (320 x 240)
4x	N/A	N/A	N/A	4.25° x 3.25° (160 x 120)	2.5° x 2° (160 x 120)	1.5° x 1° (160 x 120)
LENS PACKAGE INCLUDES:	QD35, QD65 or QD100 Lens (as selected at purchase), Lens Cap, Lens Cover, Lens Cloth					
RANGE PERFORMANCE						
Detect Man (1.8 m x 0.5 m)	~850 yds	~1,400 yds	~1.2 mi	~1,200 yds	~1.1 mi	~1.5 mi
Detect Vehicle (4 m x 1.5 m)	~1.3 mi	~2.4 mi	~3.2 mi	~1.5 mi	~2.9 mi	~3.7 mi

Actual range may vary depending on camera setup, focus adjustment (if available), environmental conditions (i.e., humidity, rain, snow, fog, etc.), user experience, and display method.

Actual range may vary depending on camera setup, focus adjustment (if available), environmental conditions (i.e., humidity, rain, snow, fog, etc.), user experience, and display method.

†Register camera at FLIR.com/cs/warranty to upgrade to a 3-year Parts & Labor, 10-year detector warranty for free.

AMERICAS

Billerica
25 Esquire Road
N. Billerica, MA 01862
USA
1-866-404-5627

São Paulo
Av. Antonio
Bardella, 320
Sorocaba, SP 18052-852
Brasil
+55 15 3238-8075

ASIA

Shanghai
K301-302, No 26 Lane 168,
Daduhe Road
Putuo District, Shanghai 200062
P.R.China
+86-21-5169-7628

EUROPE

Luxemburgstraat 2
2321 Meer
Belgium
+32 3665-5100

CORPORATE HEADQUARTERS

Portland
27700 SE Parkway Ave.
Wilsonville, OR 97070
USA
877-773-9547

Note: The thermal images shown are for illustrative purposes only, and may not have been taken by the camera series depicted. Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited.
©2016 FLIR Systems, Inc. Specifications are subject to change without notice, check our website: www.flir.com. 05/26/16



HS-X 320

HS-XR 640



The World's Sixth Sense®